

HANSAPINTO

INSTALLATION AND MAINTENANCE GUIDE






4-8



9-12




12



13-19





20



21-24

**4504 2283**



EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +80°C

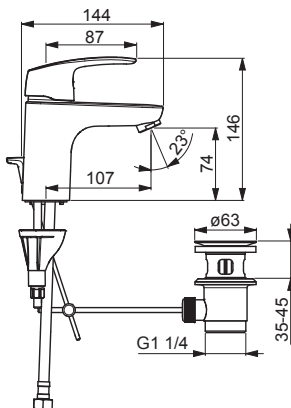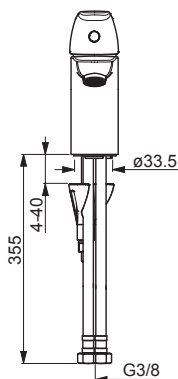

DW-6506CS0561

static.hansa.com/45042283**4501 2283**



EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +80°C

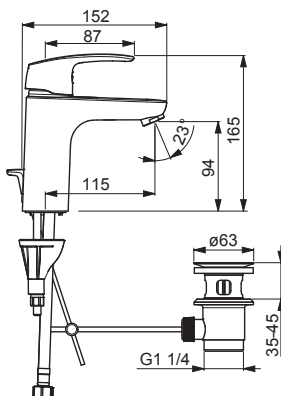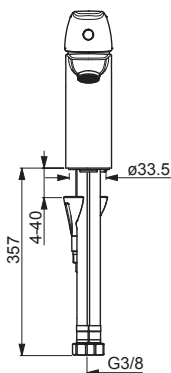

DW-6506CS0561

static.hansa.com/45012283**4506 2283**

EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +80°C

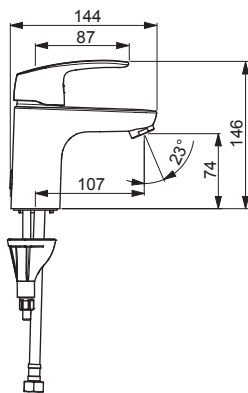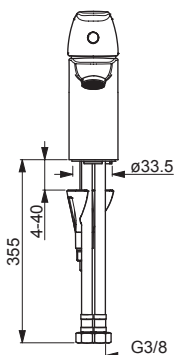



DW-6506CS0561

static.hansa.com/45062283



4502 2283

EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +80°C


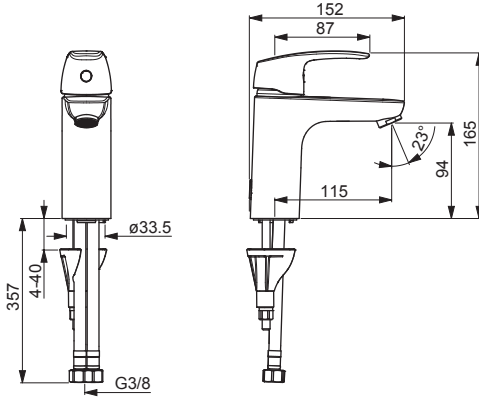


static.hansa.com/45022283

DW-6506CS0561

4505 2283



EN 817
 50 - 1000 kPa
 0.15 l/s (300 kPa)
 0.10 l/s (300 kPa w/Controller)
 max. +65°C

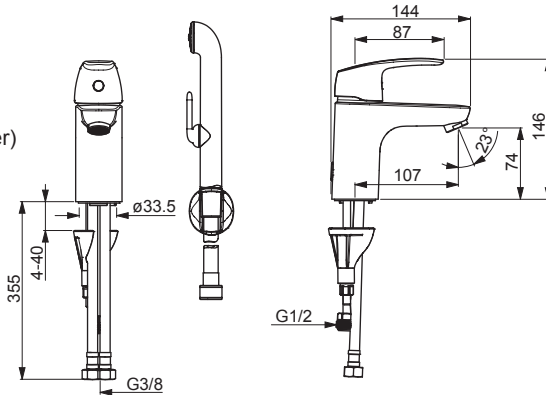

static.hansa.com/45052283

4507 3283

EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +90°C

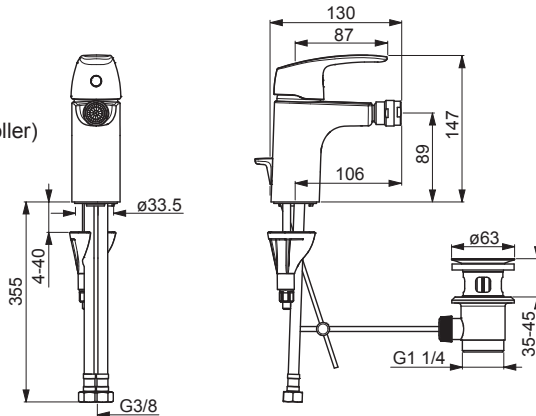



static.hansa.com/45073283

DW-6506CS0561



4509 2283

EN 817
50 - 1000 kPa
0.10 l/s (300 kPa)
max. +80°C

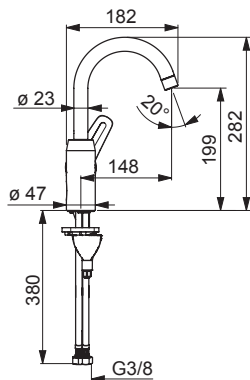
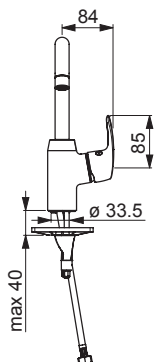


static.hansa.com/45092283

DW-6506CS0561

4510 2283

EN 817
50 - 1000 kPa
0.10 l/s (300 kPa)
max. +80°C

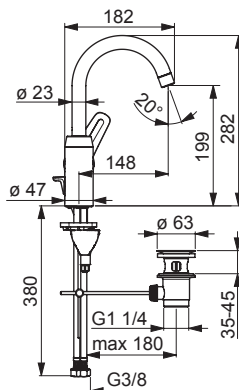
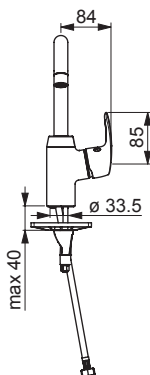


static.hansa.com/45102283

DW-6506CS0561

4515 2283

EN 817
50 - 1000 kPa
0.10 l/s (300 kPa)
max. +80°C

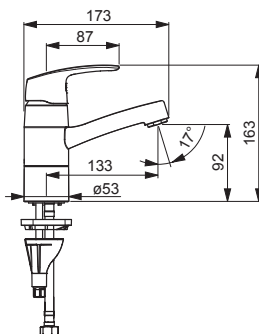
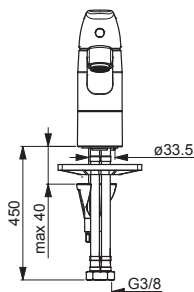


static.hansa.com/45152283



4506 2283 0037



EN 817
 50 - 1000 kPa
 0.10 l/s (300 kPa w/Controller)
 max. +80°C

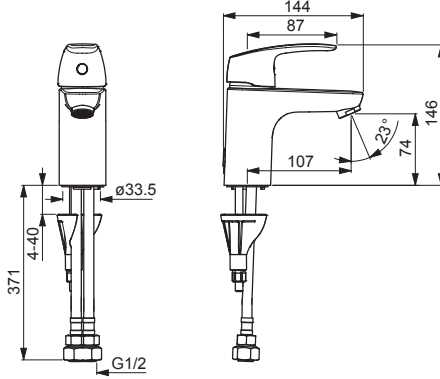

static.hansa.com/450622830037

4502 2283 0037



EN 817
 50 - 1000 kPa
 max. +80°C

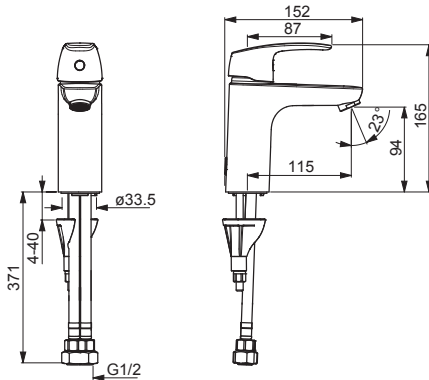

static.hansa.com/450222830037

4509 2283 0037

EN 817
 50 - 1000 kPa
 max. +80°C


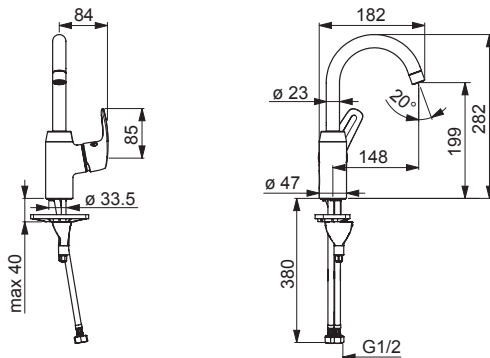


static.hansa.com/450922830037








4537 2283


EN 817
50 - 1000 kPa
0.34 / 0.32 l/s (300 kPa)
max. +90°C

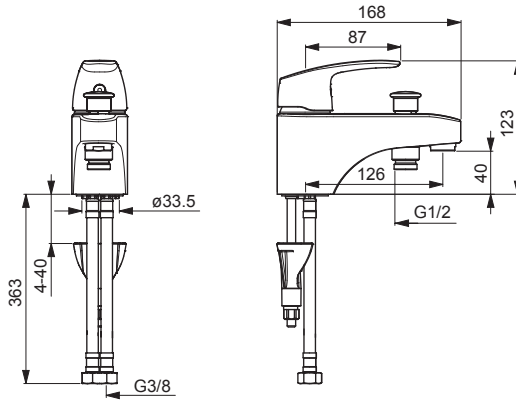

static.hansa.com/45372283






1

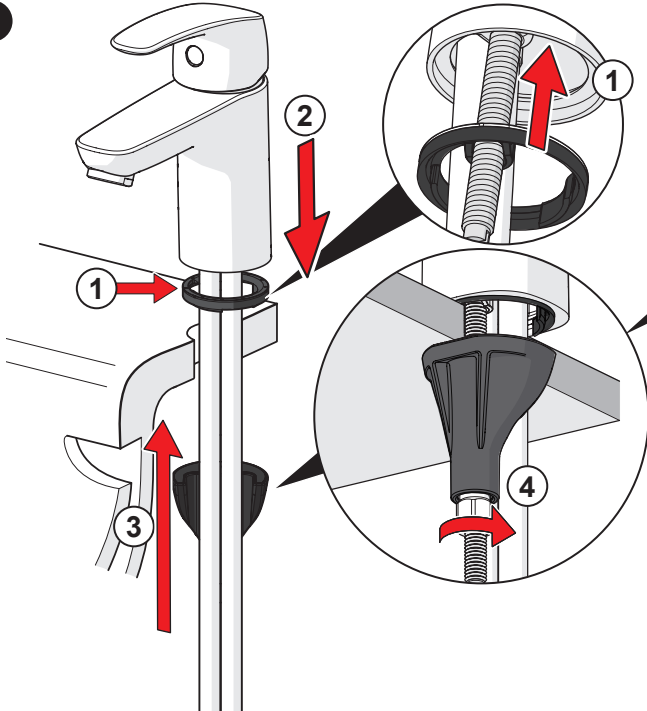






①


max.
1600 kPa

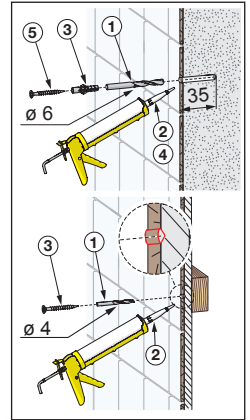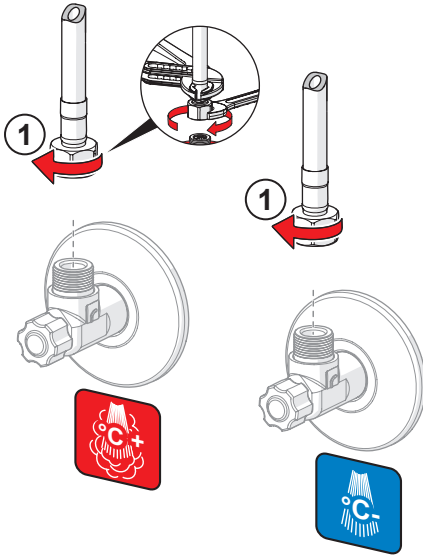









① ② ③

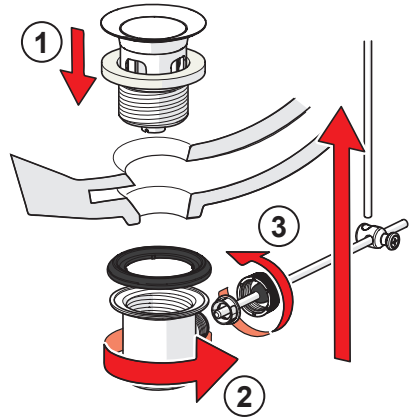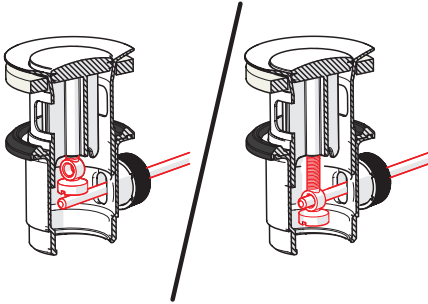





①

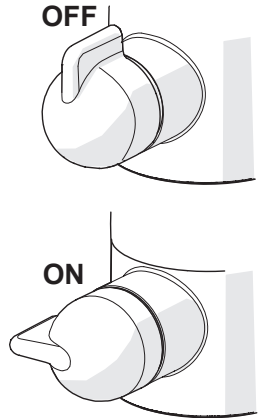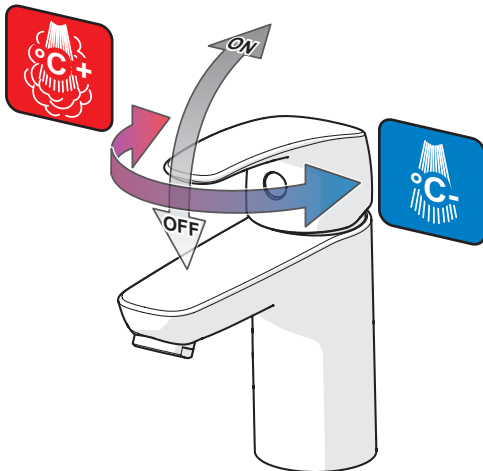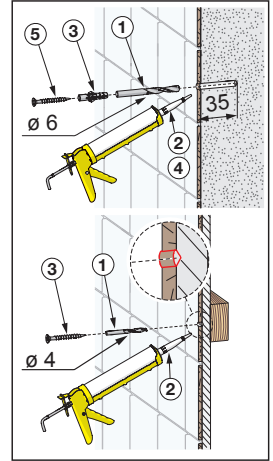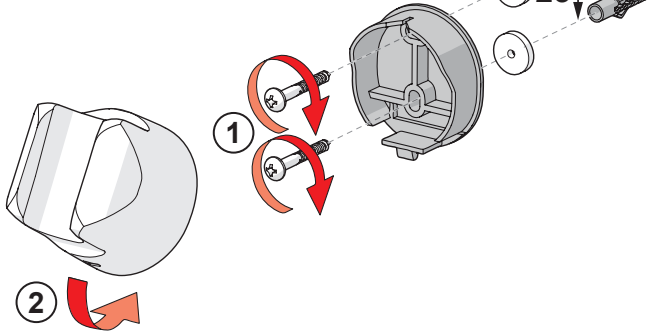








② ⑤





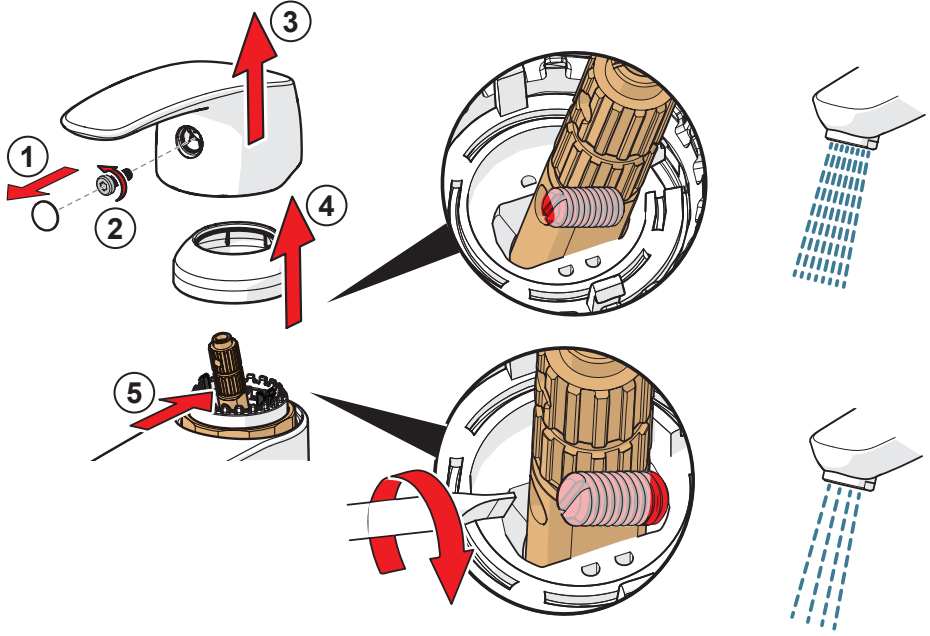








②


⑤ ⑥

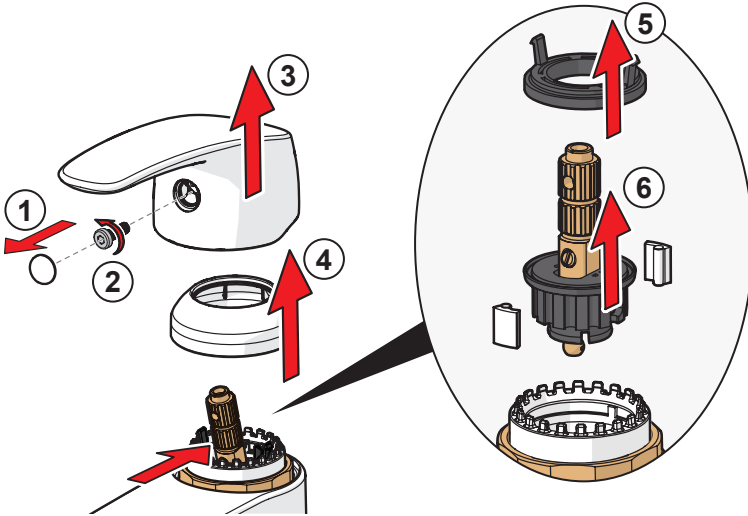

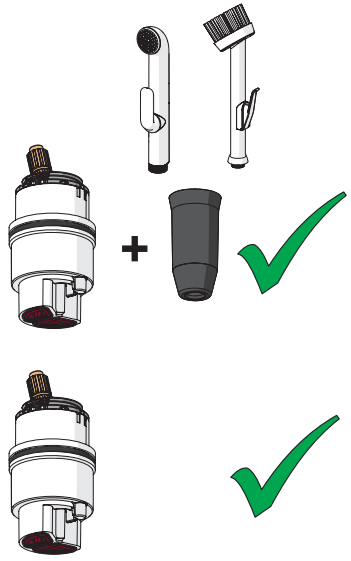

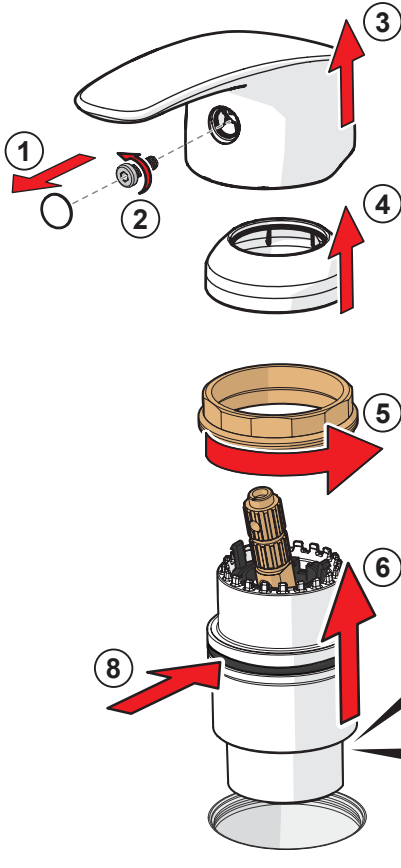
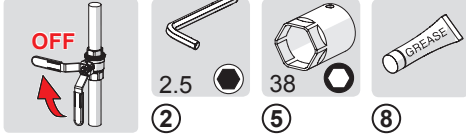


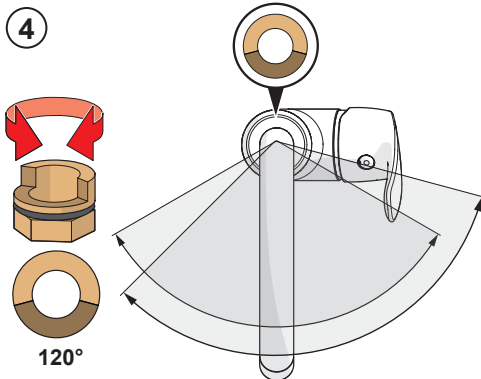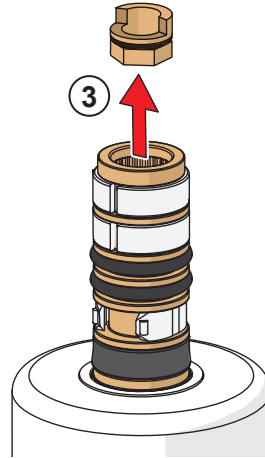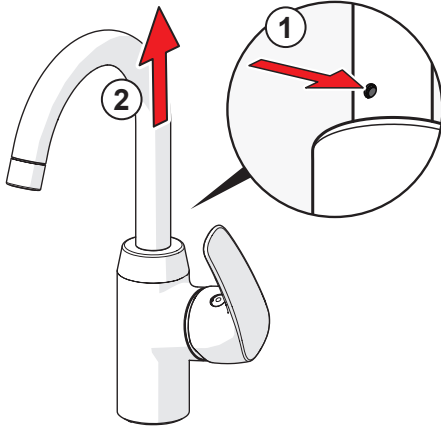

59 914 429

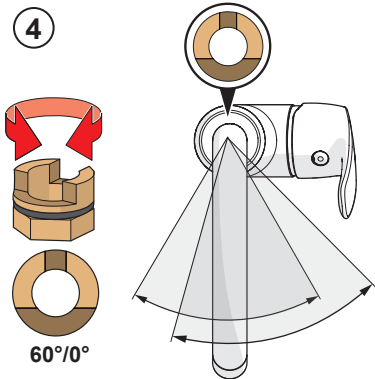

59 914 264

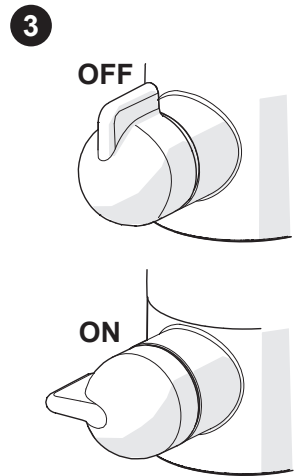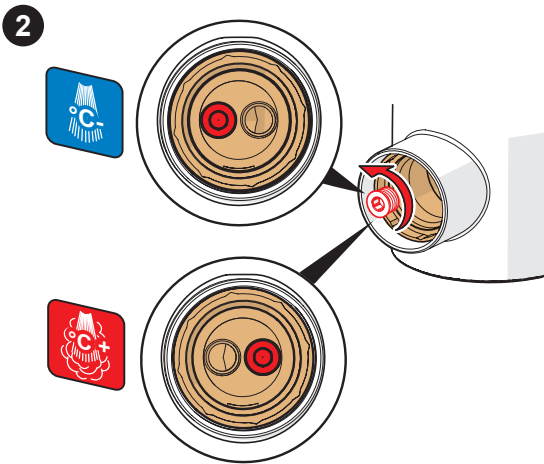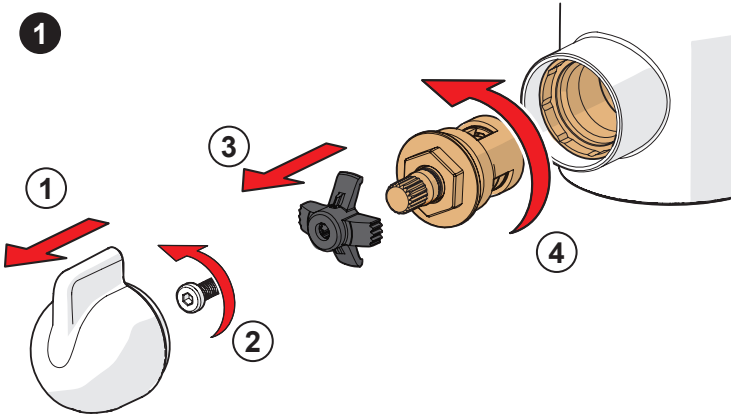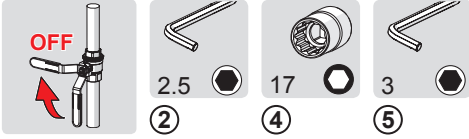



2.5

A1



G1














G2









2.5

G6

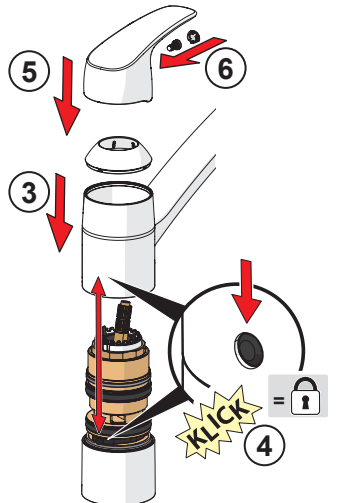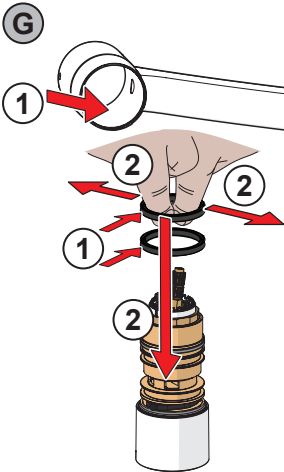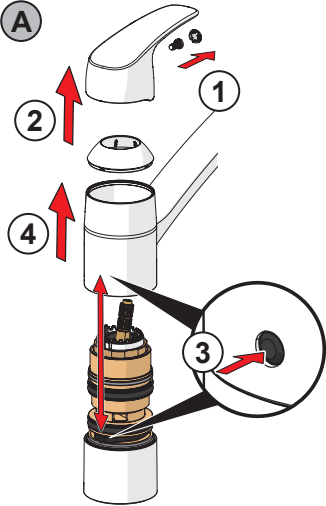

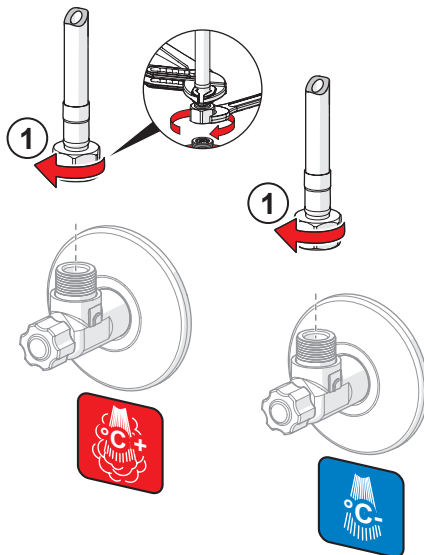

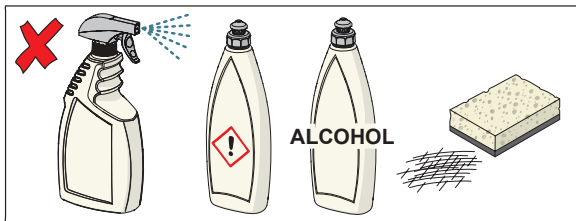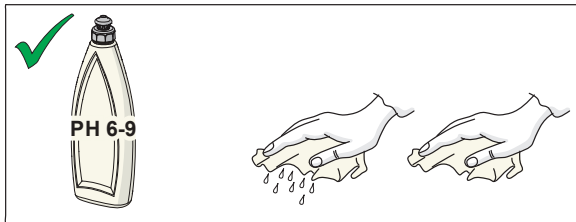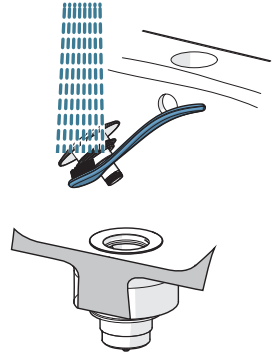


CLEANING.HANSA.COM




**4504 2283 , 4501 2283 , 4502 2283 , 4502 2283 0037 ,
4506 2283 , 4506 2283 0037 , 4505 2283**

- 1 59 914 453
- 2 59 914 478
- 3 59 914 128
- 4 59 914 129
- 5 59 914 474
- 6 59 914 475
- 7 59 914 476
- 8 59 913 653
- 9 59 914 133

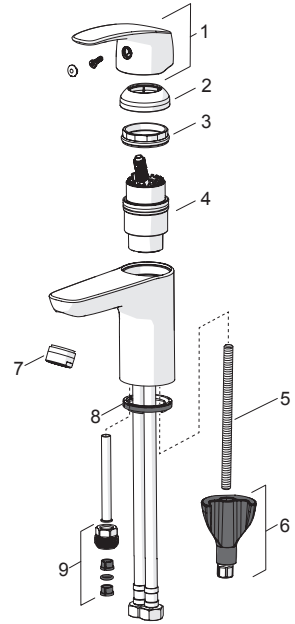

4507 3283


- 1 59 914 453
- 2 59 914 478
- 3 59 914 128
- 4 59 914 129
- 5 59 910 952
- 6 59 914 476
- 7 59 913 653
- 8 59 914 474
- 9 59 914 475

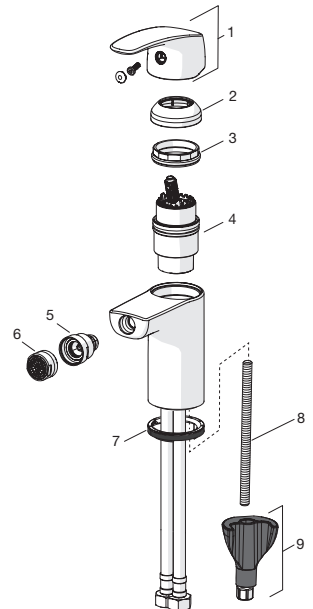


**4509 2283 , 4509 2283 0037 , 4510 2283**

- 1 59 914 479
- 2 59 914 436
- 3 59 914 429
- 3 59 914 264
- 4 59 914 431
- 5 59 914 129
- 6 59 914 128
- 7 59 914 454
- 8 59 914 480
- 9 59 913 653
- 10 59 914 474
- 11 59 914 475

120°
60°/0°

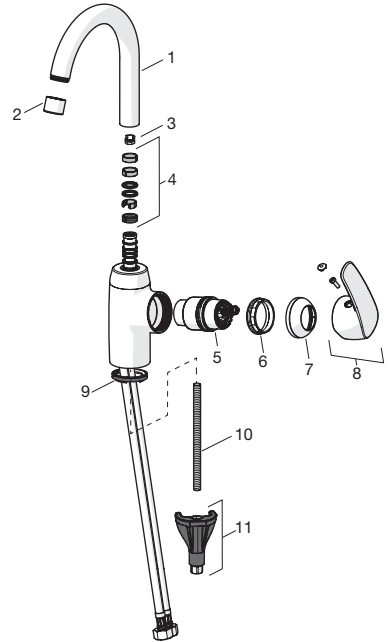**4515 2283**


- 1 59 914 453
- 2 59 914 482
- 3 59 914 128
- 4 59 914 129
- 5 59 914 483
- 6 59 914 489
- 7 59 914 474
- 8 59 914 475
- 9 59 914 484
- 10 59 914 490
- 11 59 914 485
- 12 59 914 486
- 13 59 914 591
- 14 59 910 008

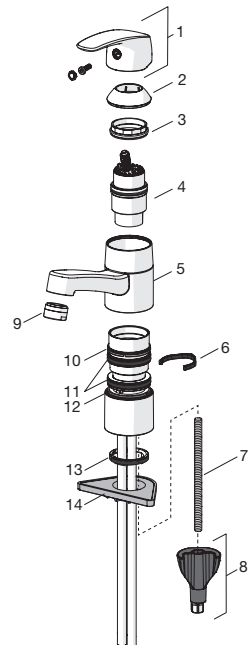




4537 2283

- 1 59 914 453
- 2 59 914 454
- 3 59 914 128
- 4 59 914 129
- 5 59 914 487
- 6 59 914 488
- 7 59 914 250
- 8 59 913 653
- 9 59 914 474
- 10 59 914 475

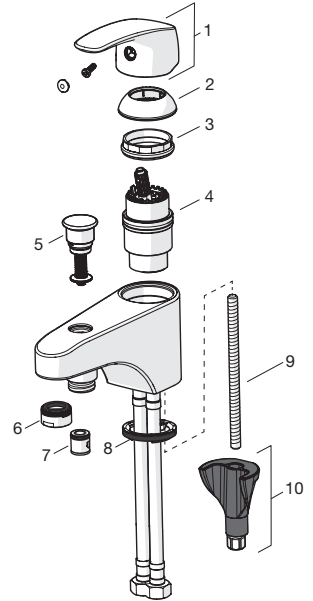

4501 2283, 4504 2283, 4507 3283, 4510 2283

- 1 59 911 456
- 2 59 902 021
- 3 59 905 077
- 4 59 905 078
- 5 59 914 477
- 6 59 904 624
- 7 59 904 622

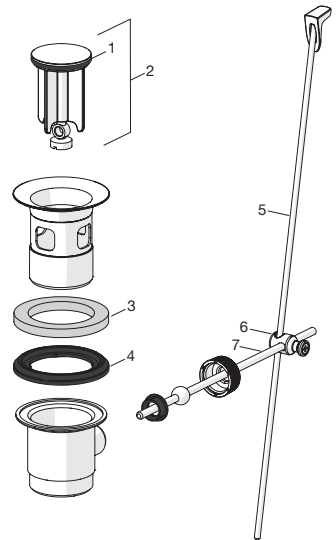




4505 2283

1 59 914 492

2 59 914 493

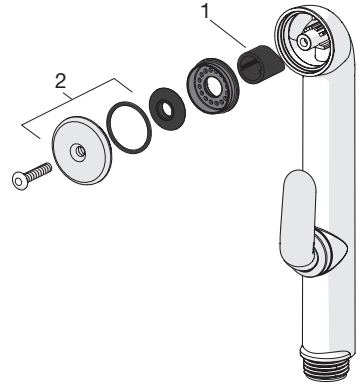

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart

Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de

www.hansa.com



a member of  orasgroup