

HANSADESIGNO STYLE

INSTALLATION AND MAINTENANCE GUIDE






4-5



6-11




12



13-22



23





24-25



5101 2283

I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +80°C


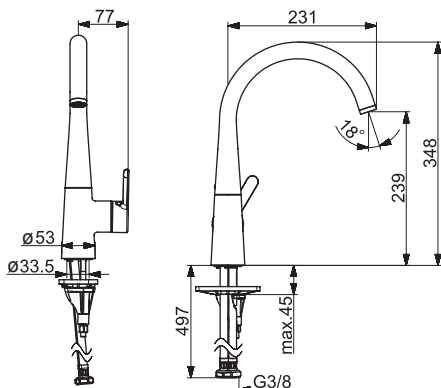


static.hansa.com/51012283

U P-IX (Prüfzeichen beantragt)

5138 2283

I (ISO 3822)
 EN 817, EN 15091
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +70°C
 IP 55
 AA 1.5 V Lithium x 2


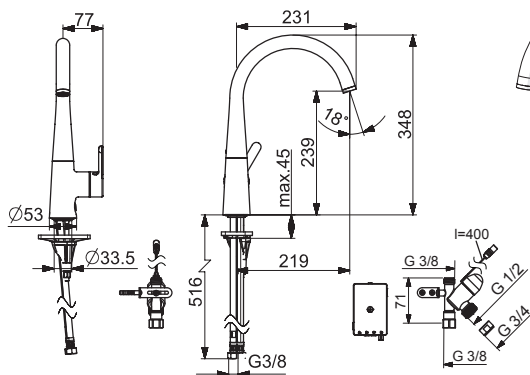


static.hansa.com/51382283

CE (EMC 2014/30/EU)

5136 2283

I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +80°C

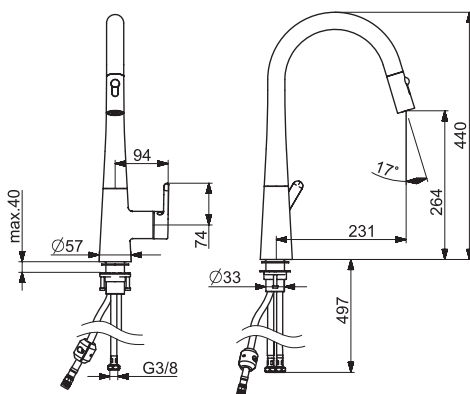


static.hansa.com/51362283

U P-IX (Prüfzeichen beantragt)



5137 2283

I (ISO 3822)
 EN 817, EN 15091
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +70°C
 IP 55
 AA 1.5 V Lithium x 2

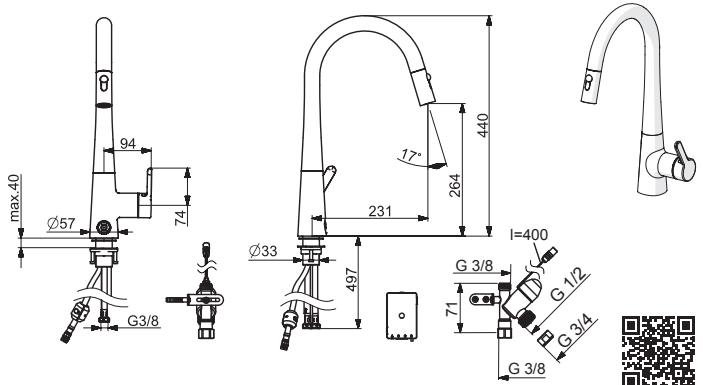


static.hansa.com/51372283

CE (EMC 2014/30/EU)

5102 1183


EN 817
 50 - 500 kPa
 0.1 l/s (300 kPa)
 300 kPa (0.1 l/s)
 max. +90°C

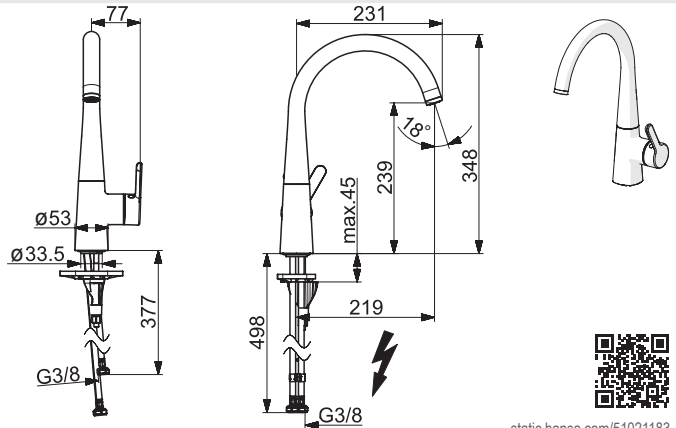





static.hansa.com/51021183

5101 2283 0037


I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +90°C


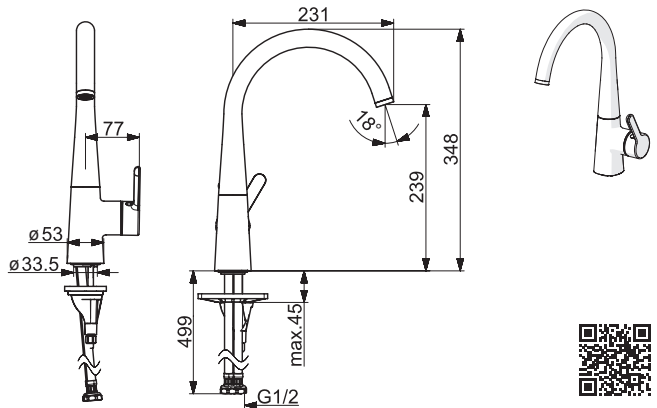


static.hansa.com/510122830037





1

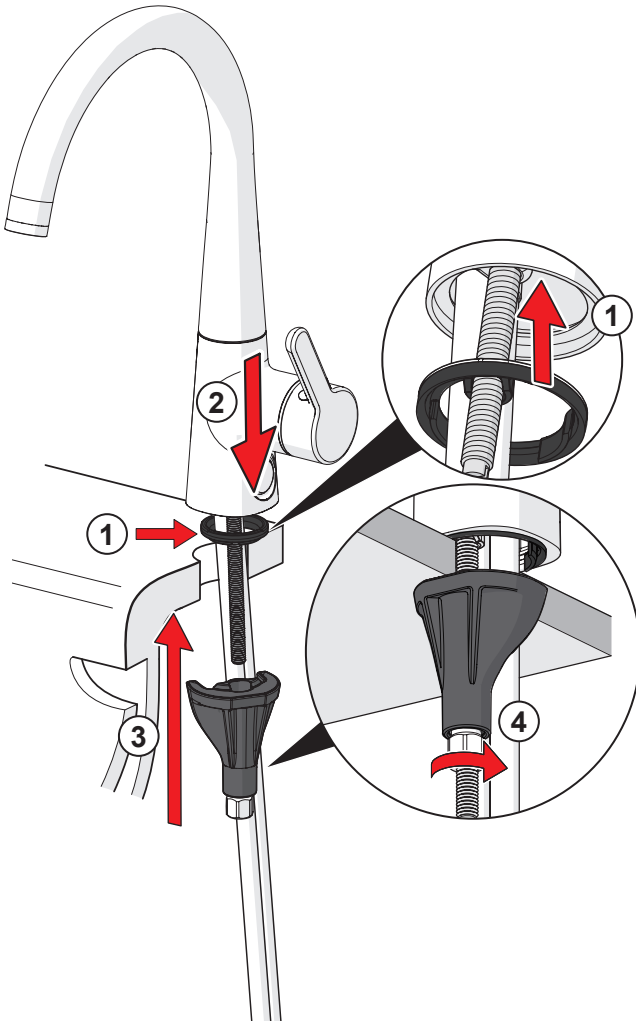



max.
1600 kPa






1



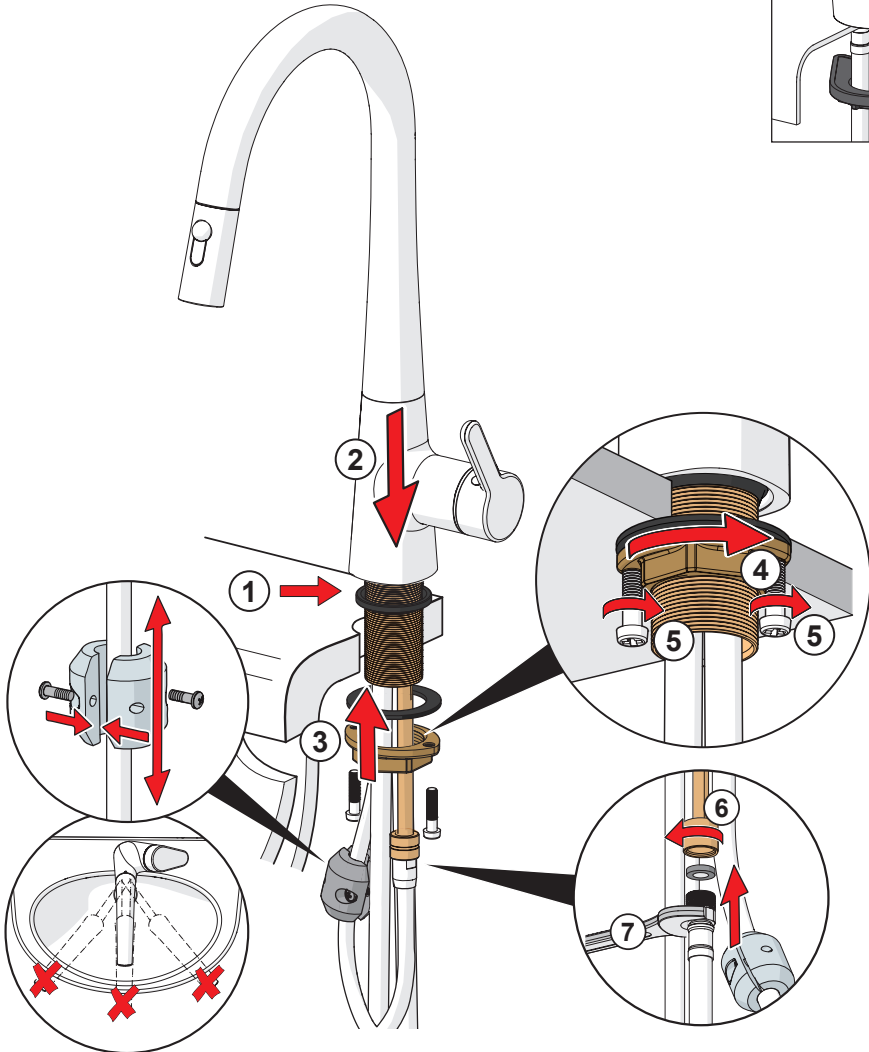






①

2

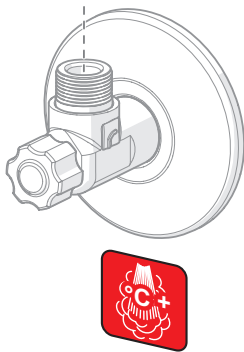

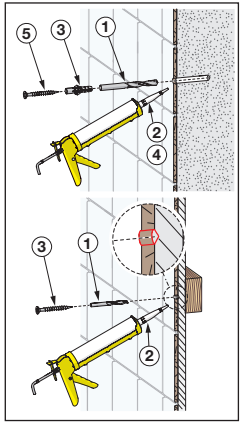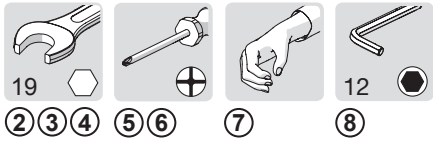

2



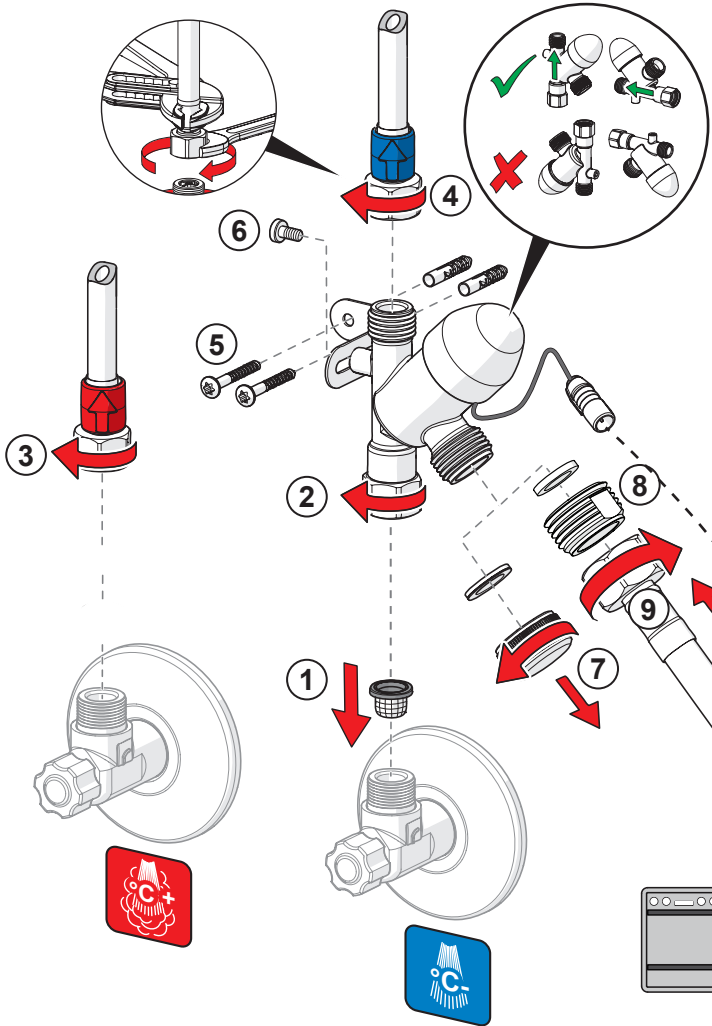





19

① ② ③ ④

2

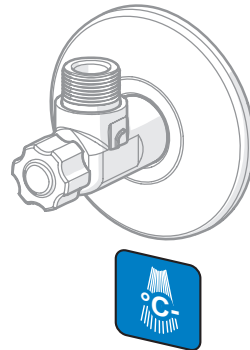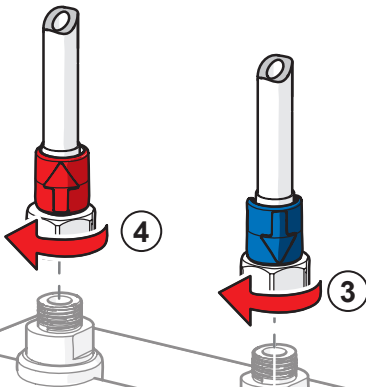
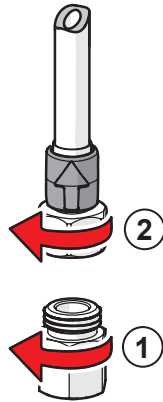





①

⑤

③

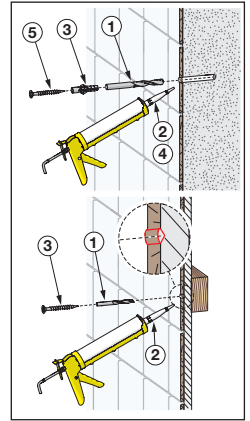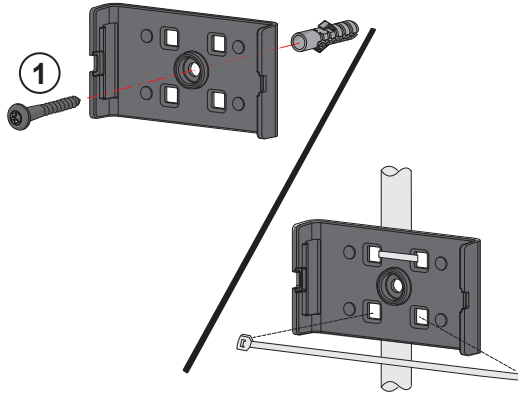


AA 1.5 V Lithium x 2

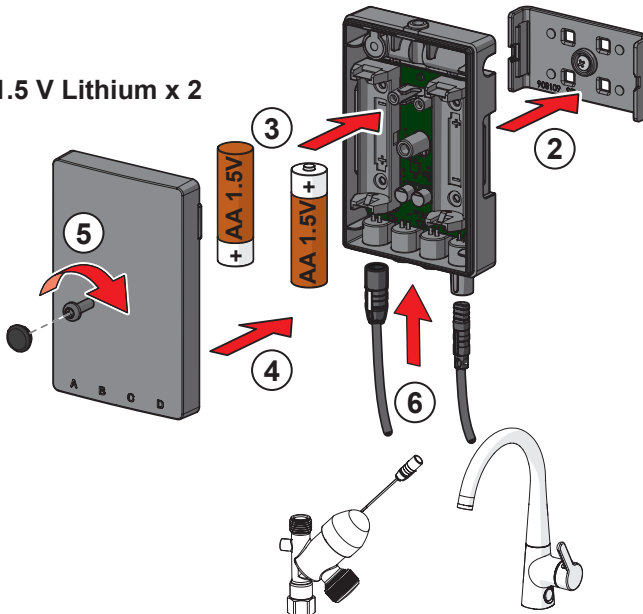





1

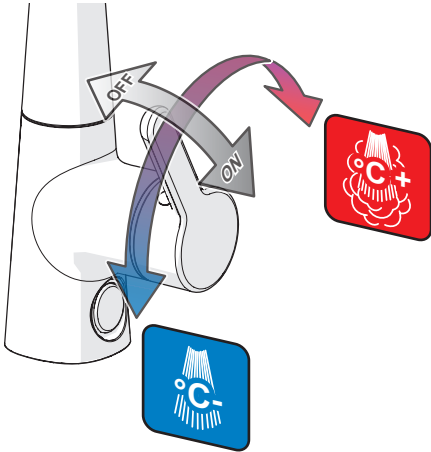


2

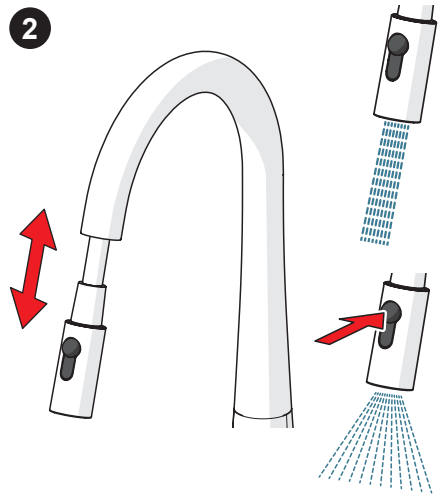


3




ON 4h



OFF

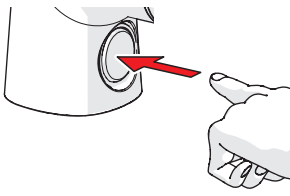



ON 12h








OFF





AA 1.5 V Lithium x 2

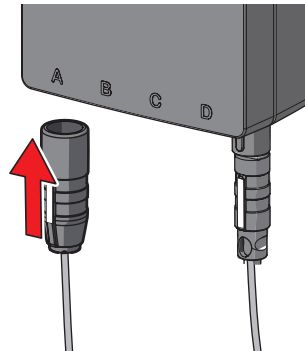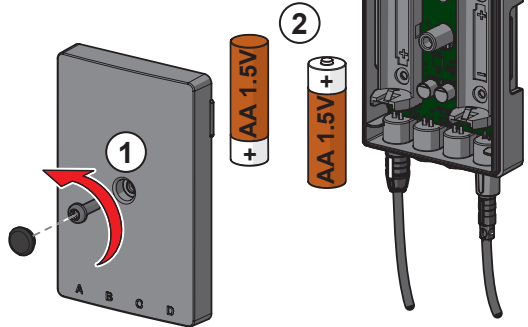

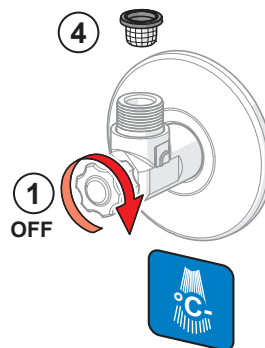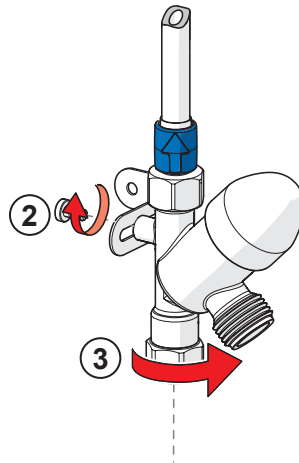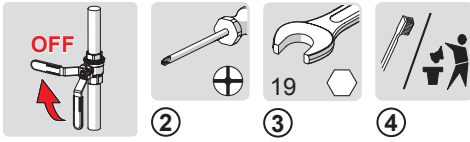


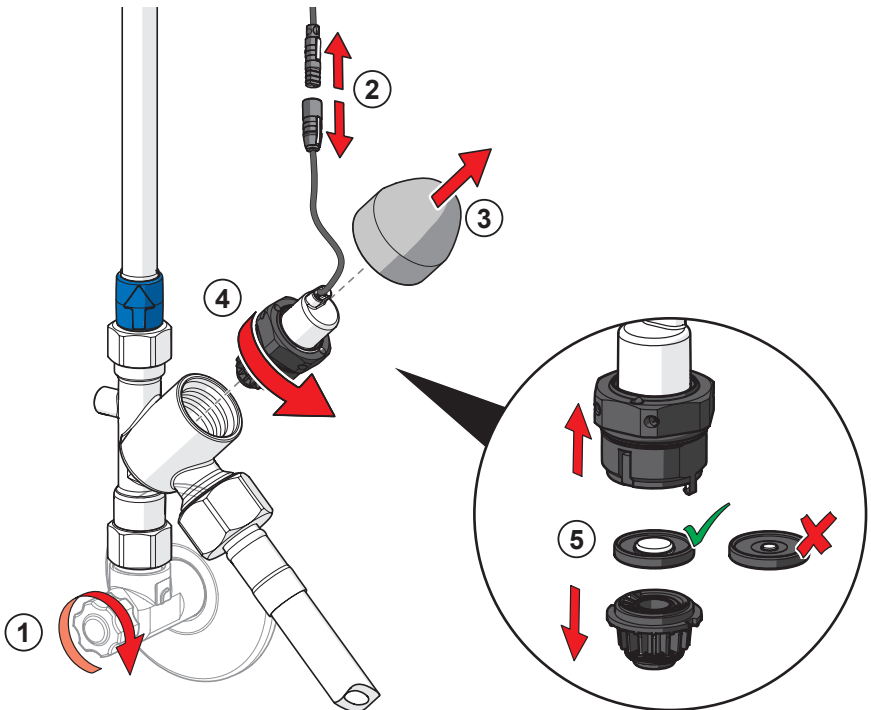









2.5










②







⑤

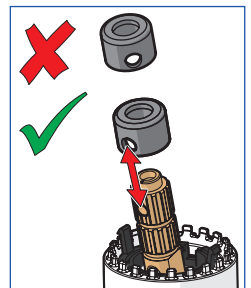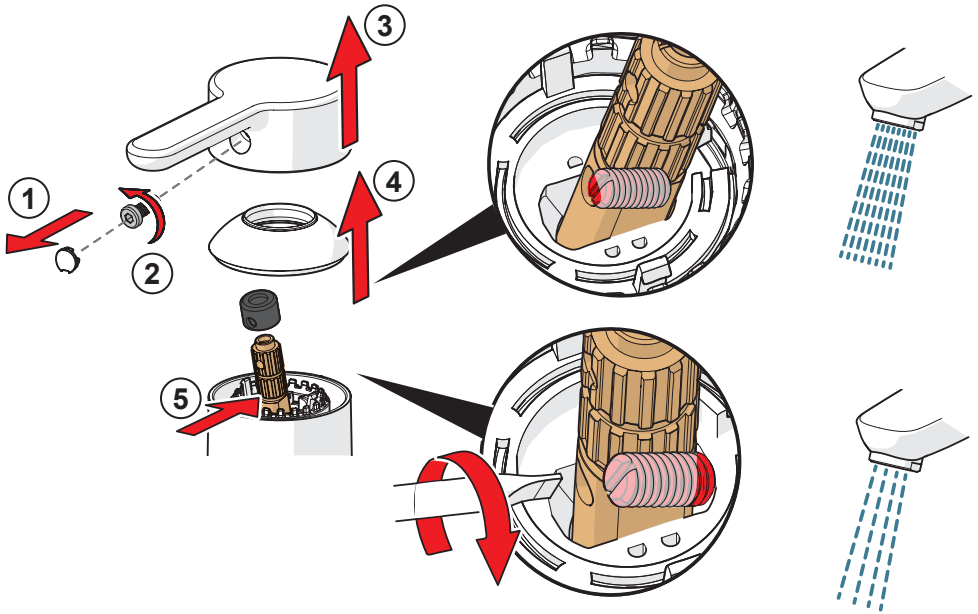


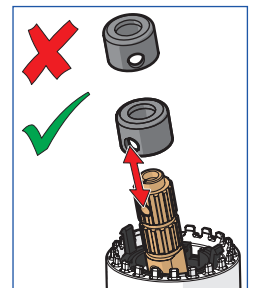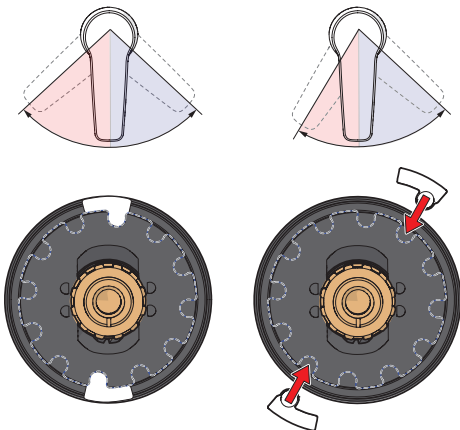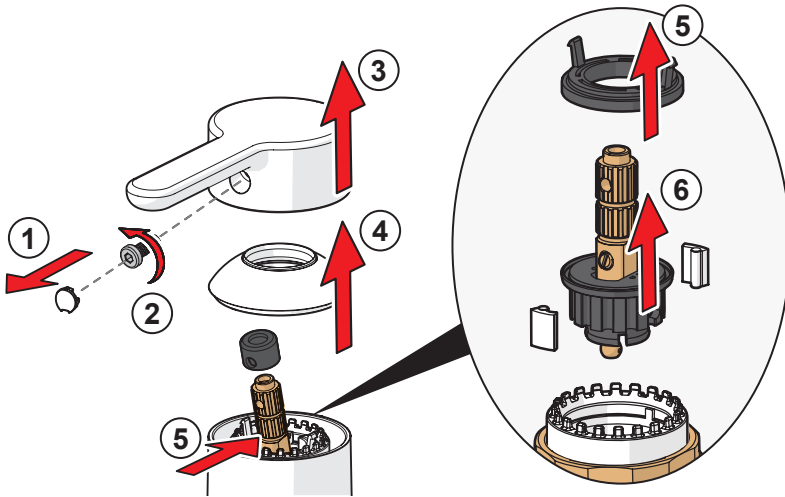



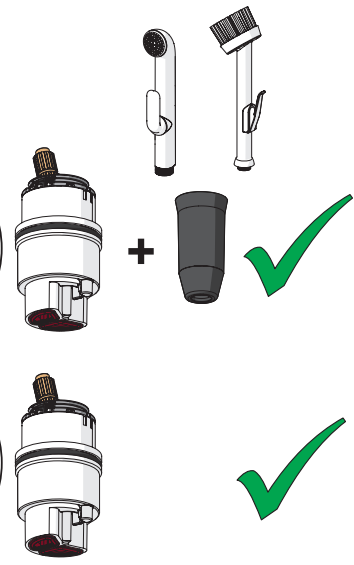


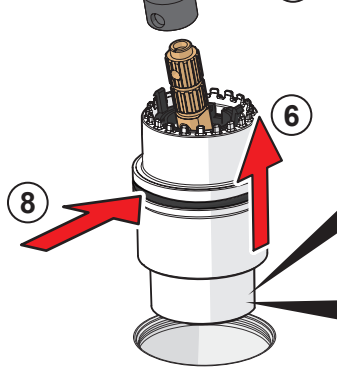

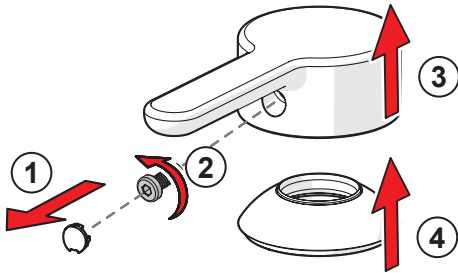
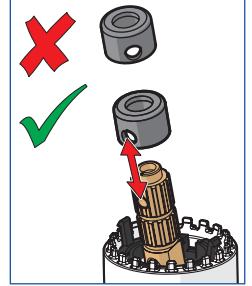





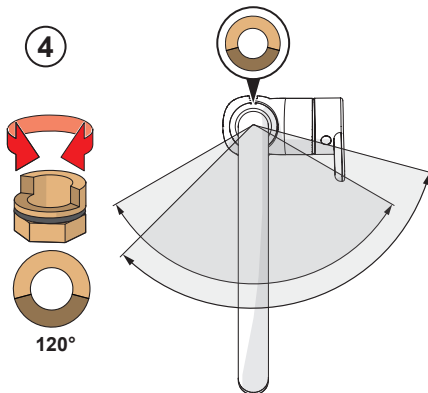
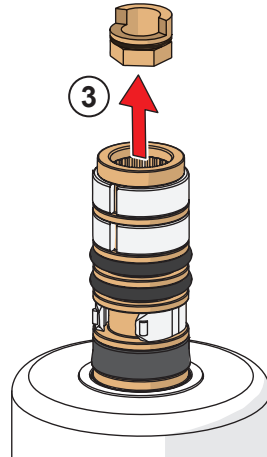
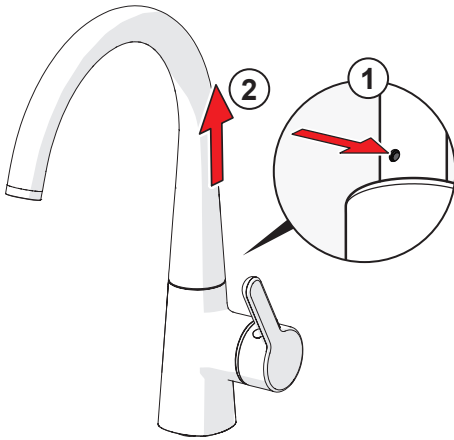







59 914 429


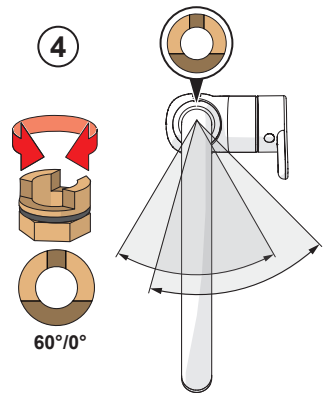


59 914 264

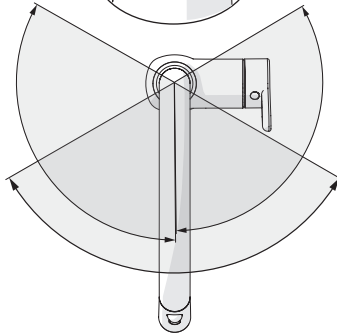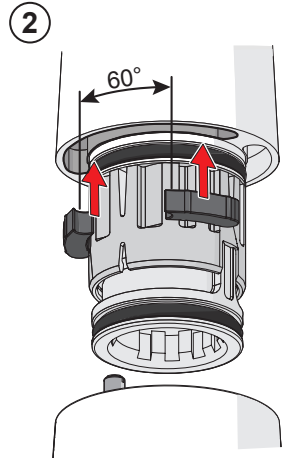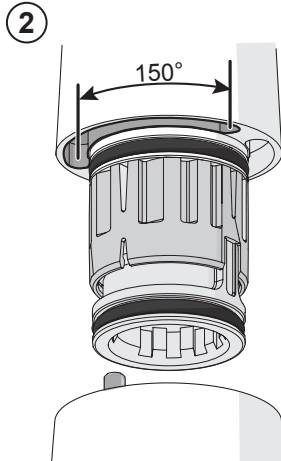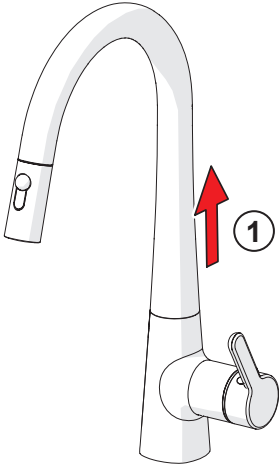

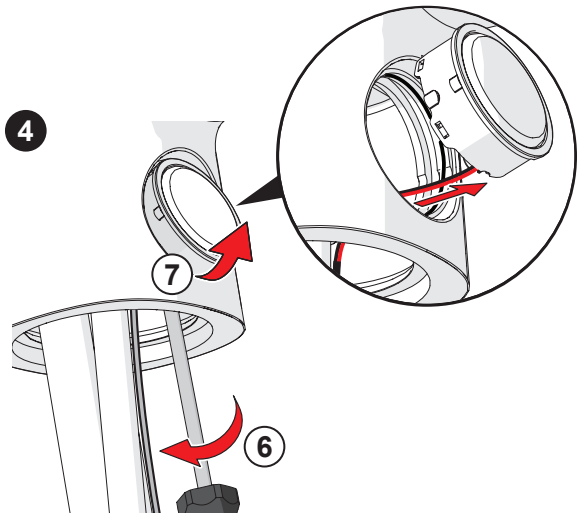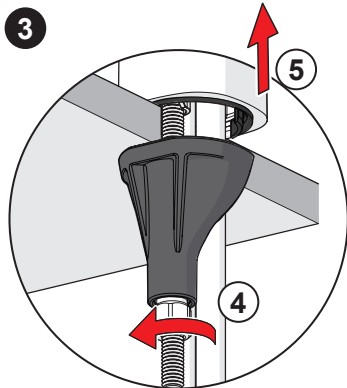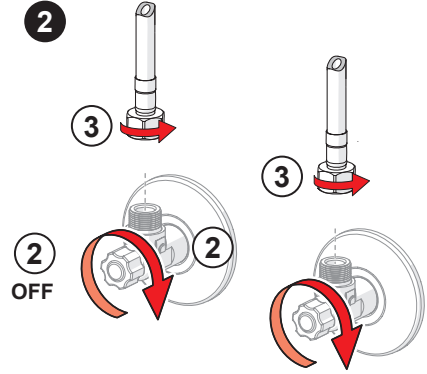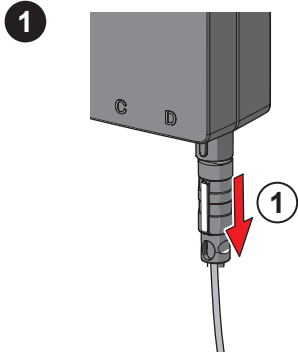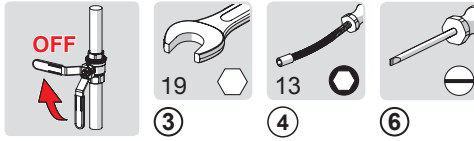

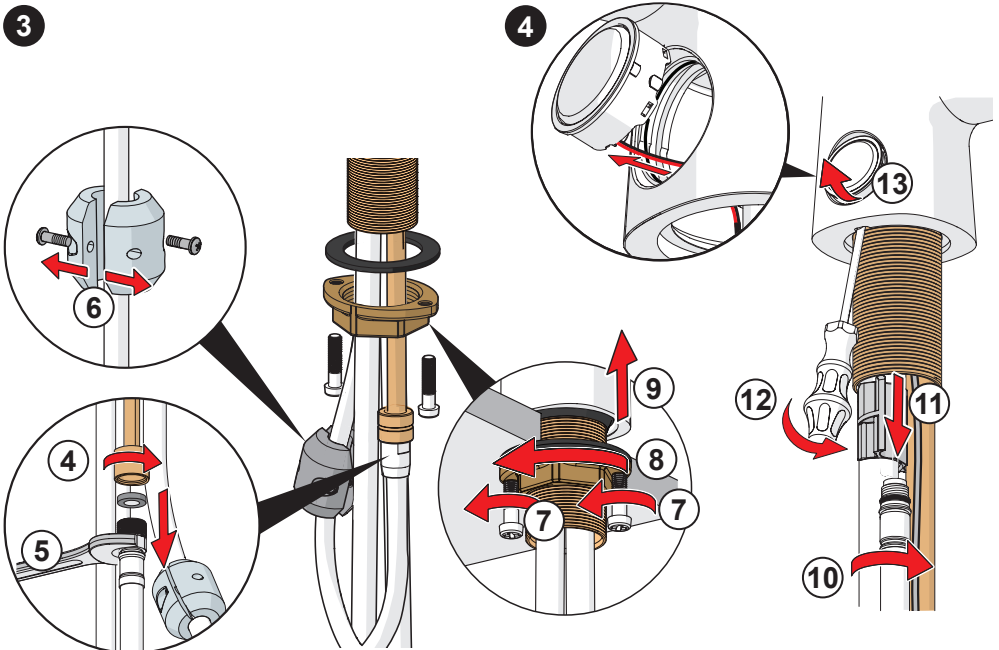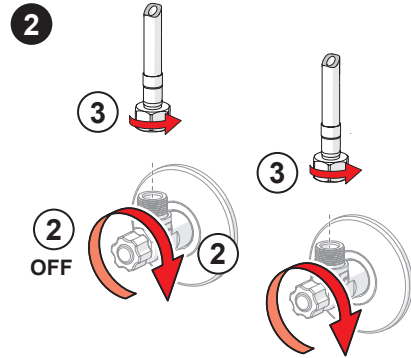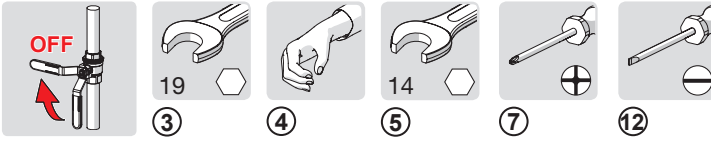




	<p>PH 6-9</p>		
		<p>ALCOHOL</p>	






5101 2283 , 5138 2283 , 5101 2283 0037

- 1 59 912 225
- 2 59 914 683
- 3 59 913 762
- 4 59 914 429 120°
- 4 59 914 264 60°/0°
- 5 59 914 431
- 6 59 914 652
- 7 59 914 573
- 8 59 914 665
- 9 59 914 649
- 10 59 914 128
- 11 59 914 684 5138 2283
- 12 59 914 591
- 13 59 910 008
- 14 59 914 474
- 15 59 914 475
- 16 59 914 685
- 16 59 914 686 5101 2283 0037

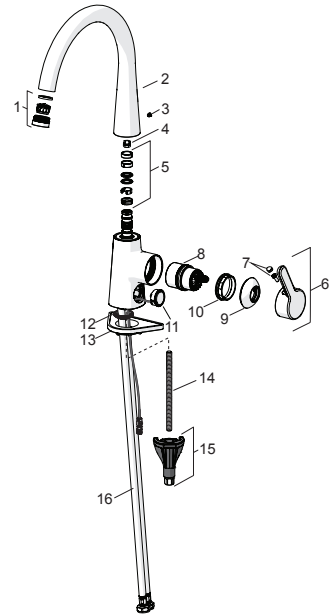

5136 2283 , 5137 2283

- 1 59 914 583
- 2 59 914 584
- 3 59 914 690
- 4 59 914 689
- 5 59 914 281
- 6 59 914 652
- 7 59 914 341
- 8 59 914 649
- 9 59 914 128
- 10 59 914 665
- 11 59 914 684 51372283
- 12 59 913 371
- 13 59 910 008
- 14 59 914 039
- 15 59 914 691

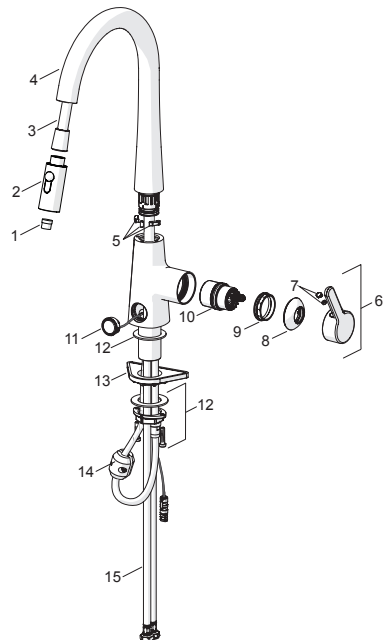

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has four manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart

Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de

www.hansa.com



a member of  orasgroup